

Storage Controller XMC

2.5-inch HDD / SSD Adapter

The Technobox P/N 7008 is designed to adapt a standard 2.5-inch SATA drive (HDD or SSD) to the XMC form factor. The Silicon Image SI3132 controller provides an interface between a one lane PCI express bus and a SATA Gen 2 interface at 3.0 GB/s.

To assure proper mating to a host board or carrier, the SATA drive interface connector on the adapter is positioned to assure that the mounted HDD or SSD does not violate the XMC component envelope. Steel rails are attached to the printed circuit board, allowing for a secure, robust installation.

An on-board BIOS, provided by Silicon Image and resident in flash

memory, supports boot up configuration. A green status LED on the printed circuit board conveys the activity of the installed drive.


This 7008 is normally supplied without a drive, permitting purchase of drives for installation by the user. If necessary, Technobox can develop a bundled solution as an additional service.

Please contact Technobox for O/S and software support.





7008

- Accepts 2.5-inch SATA HDD or SSD
- Silicon Image Si3132 controller
- PCI Express Interface (2.5 Gb/s) 1X Lane
- On-board Drive Activity LED
- Media Optional
- RoHS-compliant, Lead-free
- Commercial Temperature

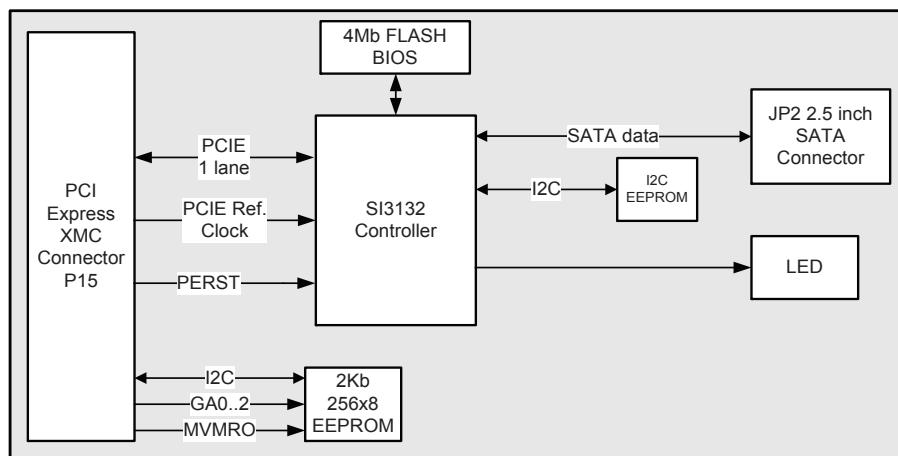

Technobox

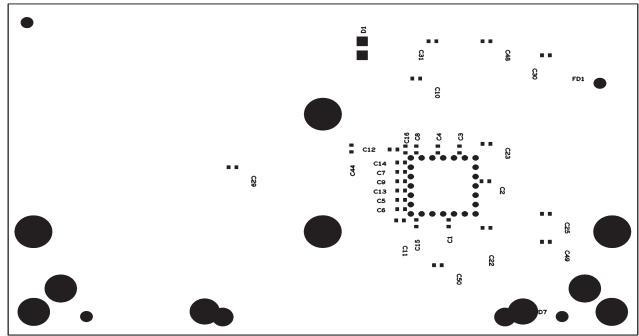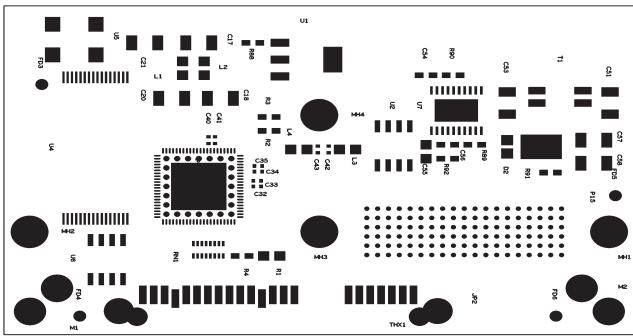

Specifications

Temperature (Operating): 0 to +70 degrees C

Temperature (Storage): -40 to +85 degrees C

Altitude: Not Specified or Characterized Typical similar equipment is at 15,000 ft.

Humidity (Operating/Storage): 5% to 90% non-condensing

Vibration: Not specified or Characterized

Shock: Not specified or Char

MTBF: Available on request

Weight: 45 grams without drive.

Power: TBD

PCI express: 1 lane, 2.5GHz Gen 1.

Voltages Required XMC: +3.3V VPWB +12V

Voltages Available Drive: 3.3V +5V +12V

Size 74 mm x 149 mm

Ordering Information

7008: 2.5-inch HD / SSD Adapter
(without media)