


Application Information

The TCP011-TM is a 3U Transition Module to be used with 3U cPCI IP carrier, providing easy access to the IP I/O lines of cPCI IP carrier with back I/O.

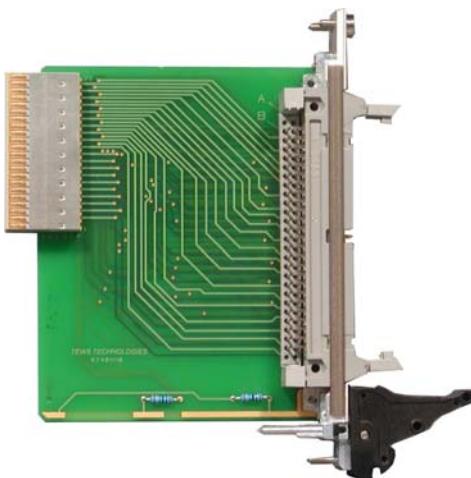


It distributes all 100 IP I/O lines from the cPCI RJ2 connector to two 50 pin ribbon cable connectors (stacked version) located in the front panel.

The operating temperature range is -40°C to +85°C.

Technical Information

- Form Factor: cPCI 3U Rear Transition Module (100mm x 80mm)
- I/O Routing:
 - I/O lines are accessible via two 50 pin ribbon cable connectors
- Front panel
- Operating temperature: -40°C to +85°C

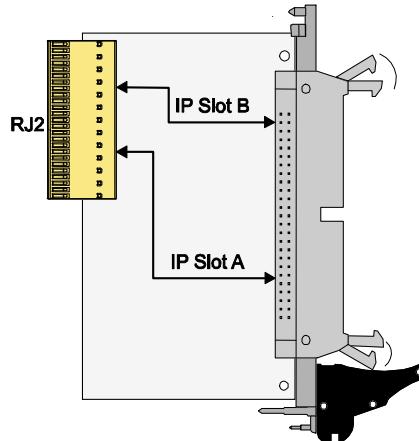

Order Information

TCP011-TM-10R

TCP011-TM-10

TCP011-TM-DOC

Transition Module for 3U cPCI IP carrier, I/O lines accessible via two 50 pin ribbon cable connectors (stacked version)
None RoHS compliant version of TCP011-TM-10R
User Manual