

## AMC526 / AMC526C – AMC Dual ADC, Virtex-7, 12-Bit @ 2.6 GSPS

AMC Dual ADC, Virtex-7, 12-Bit



AMC526



AMC526C

### KEY FEATURES

- Single module, mid-size per AMC.0
- Conduction cooled version available
- Dual AD9625 ADC, 12-Bit @ 2.6 GSPS in single module, mid-size
- Xilinx Virtex-7 690T FPGA in FFG-1761 package
- Quad bank QDR-II+ memory (576 Mb total) and 1Gb DDR3
- AMC Ports 4-11 are routed to FPGA per AMC.1, AMC.2 and AMC.4 (PCIe, SRIO, XAUI, etc. are FPGA programmable)
- AMC Ports 12-15 and 17-20 optionally routed to the FPGA
- Internal, external or backplane clock with on-board wide-band PLL
- IPMI 2.0 compliant

**AdvancedMC™**

### Benefits of Choosing VadaTech

- High performance ADC (AD9625)
- Flexible clocking
- Fast local buffer (36-bit wide)
- BSP support and example code
- Strong mil/aero support
- Electrical, mechanical, software, and system-level expertise in house
- Full system supply from industry leader
- AS9100 and ISO9001 certified company

The AMC526 provides dual-channel ADC with sample rates up to 2.6 GSPS, making it suitable for signal capture/analysis applications such as COMINT/SIGINT, radar, research and instrumentation. The on-board Virtex-7 690T is suitable for local signal processing and data reduction prior to transfer out via the backplane using PCIe, SRIO or Ethernet.

The AMC ports 12-15 and 17-20 are optionally routed to the FPGA from the AMC connector, providing the user with flexibility to support custom high-bandwidth interconnects between compatible FPGA modules (depending on backplane capabilities). The FPGA is supported by FLASH memory for boot image storage, four banks of QDR-II+ for fast data buffering and a further bank of DDR3 for local data.

TCLKA-D are routed to the FPGA via an on-board clock and jitter cleaner while FCLK is routed directly. The module includes a very flexible clocking sub-system, supporting internal or external (backplane or front panel) clock source with internal PLL/jitter cleaner.

The AMC526 is available in both air-cooled (MTCA.0 and MTCA.1) and rugged conduction-cooled (MTCA.2 or MTCA.3) versions.

## REFERENCE DESIGN

VadaTech provides a reference design implementation for our FPGAs complete with VHDL source code and configuration binaries. The reference design focuses on the I/O ring of the FPGA to demonstrate low-level operation of the interconnections between the FPGA and other circuits on the board and/or backplane. It is geared to prove out the hardware for engineering/factory diagnostics and customer acceptance of the hardware, but it does not strive to implement a particular end application

## AMC526

## BLOCK DIAGRAM

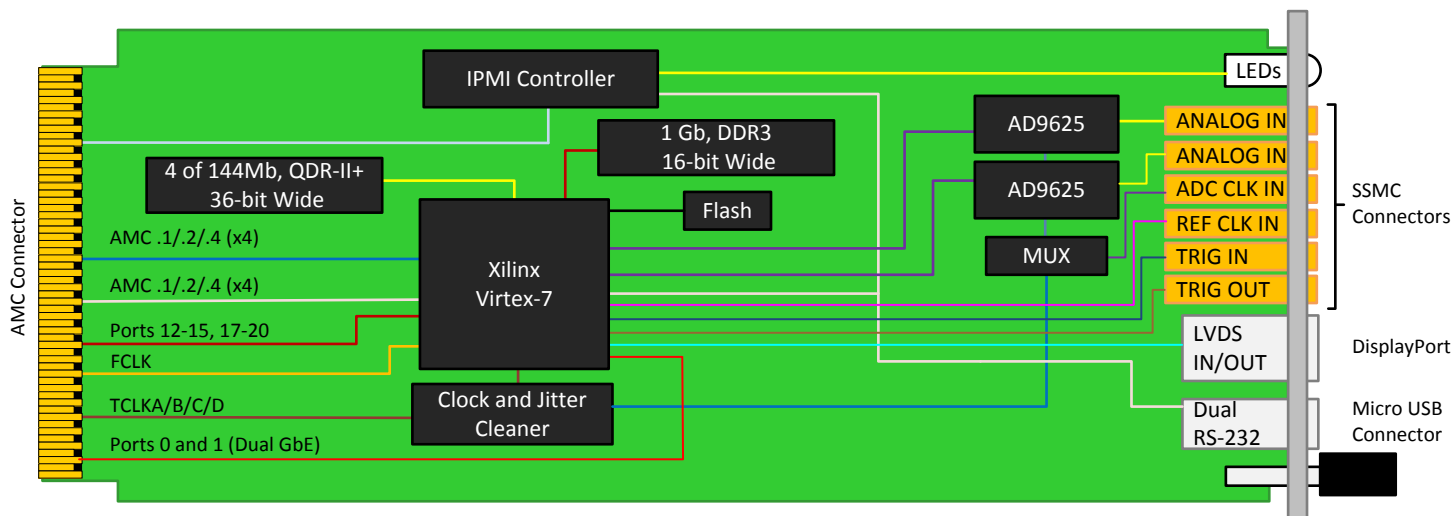


Figure 1: AMC526 Block Diagram

## FRONT PANEL

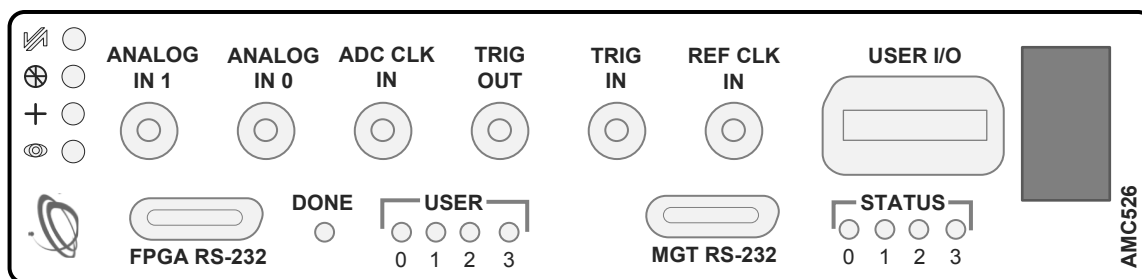


Figure 2: AMC526 Front Panel

## AMC526C

### BLOCK DIAGRAM

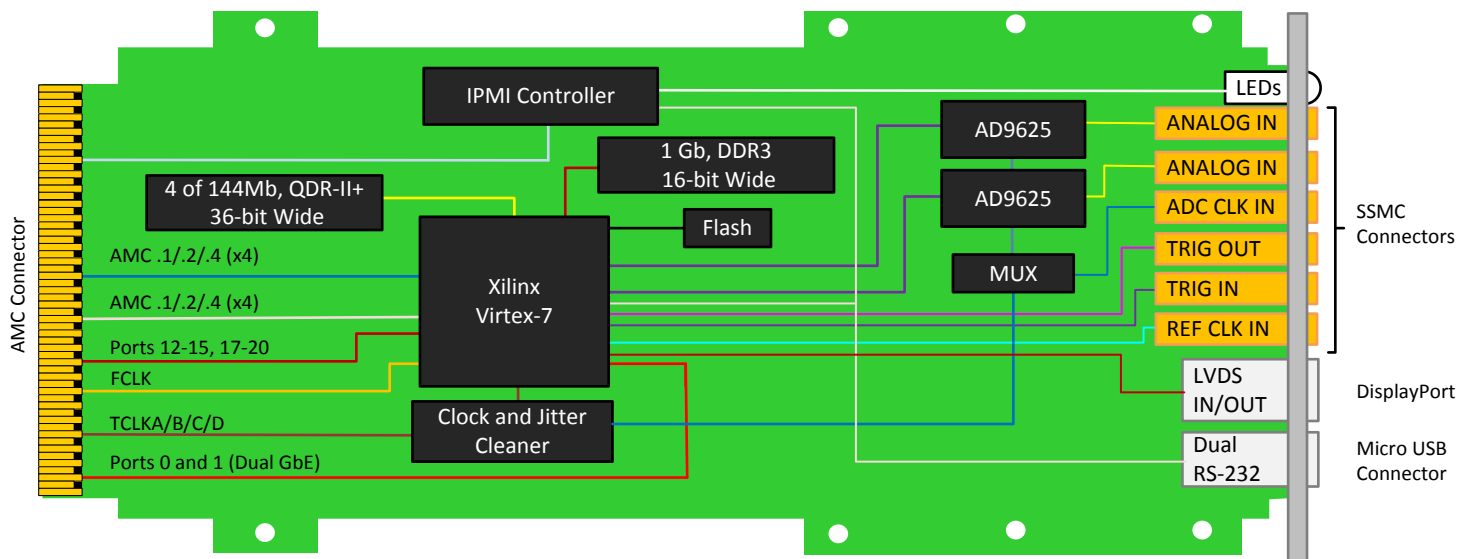


Figure 3: AMC526C Block Diagram

### FRONT PANEL

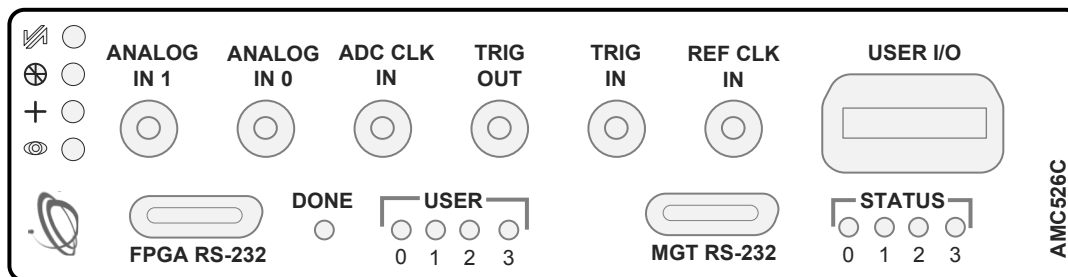


Figure 4: AMC526C Front Panel

## SPECIFICATIONS

Architecture		
Physical	Dimensions	Single module, mid-size (full-size optional)
		Width: 2.89" (73.5 mm)
		Depth 7.11" (180.6 mm)
Type	AMC FPGA Carrier	Xilinx Virtex-7 device
		576 Mb QDR-II+ (36-bit)
Standards		
AMC	Type	AMC.1, AMC.2, and AMC.4 (FPGA programmable)
Module Management	IPMI	IPMI version 2.0
PCIe	Lanes	Dual x4 via FPGA to AMC or x8
Ethernet	GbE	Dual GbE
Configuration		
Power	AMC526	~40W typical (FPGA code dependent)
Environmental	Temperature	Operating temperature: -5° to 45° C (55°C for limited time, performance restrictions may apply), industrial and military versions also available (See <a href="#">environmental spec sheet</a> )
		Storage Temperature: -40° to +85°C
	Vibration	Operating 9.8 m/s <sup>2</sup> (1.0 G), 5 to 500Hz
	Shock	30Gs on each axis
Front Panel	Relative Humidity	5 to 95 per cent, non-condensing
	Interface Connectors	Front panel ADC, CLK/TRIGIN, MGT RS-232,
	LEDs	IPMI management control
		4 user defined LEDs, 5 general status LEDs
	Mechanical	Hot swap ejector handle
	Operating System	Linux (consult VadaTech for other options)
Conformal Coating		Humiseal 1A33 Polyurethane (Optional)
		Humiseal 1B31 Acrylic (Optional)
Other		
MTBF	MIL Hand book 217-F @ TBD Hrs	
Certifications	Designed to meet FCC, CE and UL certifications where applicable	
Standards	VadaTech is certified to both the ISO9001:2000 and AS9100B:2004 standards	
Warranty	Two (2) years	

## INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of ATCA and  $\mu$ TCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTM), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information

## Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

## ORDERING OPTIONS

### AMC526 – ABC – DEF – GHJ

**A = RF Direct Clock sampling**

- 0 = Front panel
- 1 = On board wide-band PLL

**B = Ports 12-15 and 17-20**

- 0 = To FPGA
- 1 = Not Routed

**C = Front Panel**

- 1 = Reserved
- 2 = Mid-size
- 3 = Full-size
- 4 = Reserved
- 5 = Mid-size, MTCA.1 (captive screw)
- 6 = Full-size, MTCA.1 (captive screw)

**D = FPGA**

- 0 = Reserved
- 1 = Reserved
- 2 = XC7VX690T

**E = FPGA Speed**

- 1 = Reserved
- 2 = High
- 3 = Highest

**F = PCIe Option**

- 0 = No PCIe
- 1 = PCIe on ports 4 – 7
- 2 = PCIe on ports 8 – 11
- 3 = PCIe on ports 4 – 11

**G = Clock Holdover Stability**

- 0 = Standard (XO)
- 1 = Stratum-3 (TCXO)

**H = Sampling Rate**

- 0 = 2.5 GSPS
- 1 = 2.6 GSPS

**J = Temperature Range and Coating**

- 0 = Commercial (–5° to +55° C), No coating
- 1 = Commercial (–5° to +55° C), Humiseal 1A33 Polyurethane
- 2 = Commercial (–5° to +55° C), Humiseal 1B31 Acrylic
- 3 = Industrial (–20° to +70° C), No coating
- 4 = Industrial (–20° to +70° C), Humiseal 1A33 Polyurethane
- 5 = Industrial (–20° to +70° C), Humiseal 1B31 Acrylic
- 6 = Military (–40° to +85° C), Humiseal 1A33 Polyurethane
- 7 = Military (–40° to +85° C), Humiseal 1B31 Acrylic

### AMC526C – ABC – DEF – GHJ

**A = RF Direct Clock sampling**

- 0 = Front panel
- 1 = On board wide-band PLL

**B = Ports 12-15 and 17-20**

- 0 = To FPGA
- 1 = Not Routed

**C = Ruggedization Level\***

- 0 = None
- 1 = Contact Vadatech
- 2 = Contact Vadatech
- 3 = Contact Vadatech

**D = FPGA**

- 0 = Reserved
- 1 = Reserved
- 2 = XC7VX690T

**E = FPGA Speed**

- 1 = Reserved
- 2 = High
- 3 = Highest

**F = PCIe Option**

- 0 = No PCIe
- 1 = PCIe on ports 4 – 7
- 2 = PCIe on ports 8 – 11
- 3 = PCIe on ports 4 – 11

**G = Clock Holdover Stability**

- 0 = Standard (XO)
- 1 = Stratum-3 (TCXO)

**H = Sampling Rate**

- 0 = 2.5 GSPS
- 1 = 2.6 GSPS

**J = Temperature Range and Coating\*\***

- 0 = Commercial (–5° to +55° C), No coating
- 1 = Commercial (–5° to +55° C), Humiseal 1A33 Polyurethane
- 2 = Commercial (–5° to +55° C), Humiseal 1B31 Acrylic
- 3 = Industrial (–20° to +70° C), No coating
- 4 = Industrial (–20° to +70° C), Humiseal 1A33 Polyurethane
- 5 = Industrial (–20° to +70° C), Humiseal 1B31 Acrylic
- 6 = Military (–40° to +85° C), Humiseal 1A33 Polyurethane
- 7 = Military (–40° to +85° C), Humiseal 1B31 Acrylic

\*Ruggedization level is per the uTCA.2 and uTCA.3 specification

\*\*Edge of module

## RELATED PRODUCTS



**VT899 Cube Chassis**



**FMC223 High Speed  
FMC for DAC**



**VT872 1/2 ATR Short, 6 AMC  
Conduction Cooled Chassis**

## CONTACT US

### VadaTech Corporate Office

198 N. Gibson Rd.  
Henderson, NV 89014  
Email: [info@vadatech.com](mailto:info@vadatech.com)  
Telephone: +1 702 896-3337  
Fax: +1 702 896-0332

### Asia Pacific Sales Office

7 Floor, No. 2, Wenhui Street, Neihu District,  
Taipei 114, Taiwan  
Email: [info@vadatech.com](mailto:info@vadatech.com)  
Telephone: +886-2-2627-7655  
Fax: +886-2-2627-7792

### VadaTech European Sales Office

Ocean Village Innovation Centre, Ocean Way,  
Ocean Village, Southampton, SO14 3JZ  
Email: [info@vadatech.com](mailto:info@vadatech.com)  
Telephone: +44 2380 381982  
Fax: +44 2380 381983