


AMC535 – FPGA Altera Carrier for FMC, Arria-10™ SOC SX660

FPGA Arria-10™

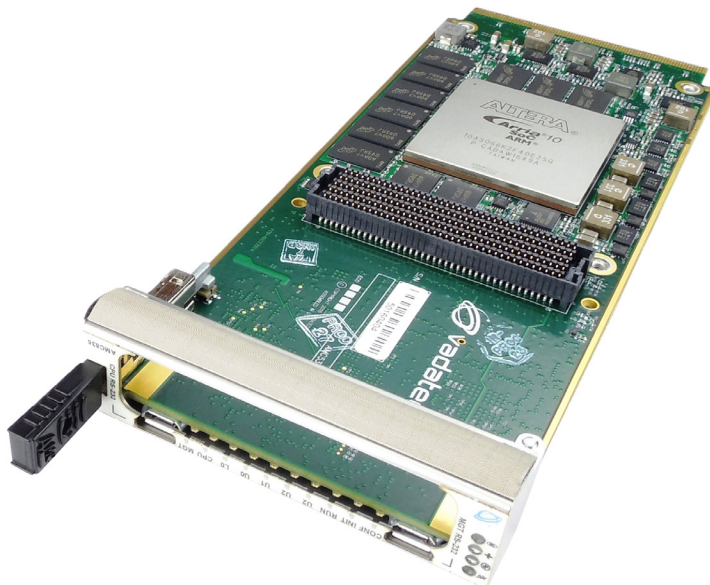

KEY FEATURES

- Single module, mid-size AMC (full-size optional)
- Altera Arria-10 SOC (System On Chip) SX660 in F1517 package
- AMC Ports 4-11 are routed to FPGA per AMC.1, AMC.2 and AMC.4 (protocols such as PCIe, SRIO, 10GbE/40GbE, etc. are FPGA programmable)
- AMC Ports 12-15 and 17-20 are routed to the FPGA
- AMC FCLKA, TCLKA, TCLKB, TCLKC and TCLKD are routed
- Clock jitter cleaner
- 16 GB of DDR-4 (dual bank of 64-bits)
- IPMI 2.0 compliant

AdvancedMC™

Benefits of Choosing VadaTech

- Arria-10 SOC FPGA in F1517 package
- Dual Bank of 64-bit wide DDR4 memory allows larger buffer sizes while processing and queuing data to the host
- Electrical, mechanical, software, and system-level expertise in house
- Full ecosystem of front and rear boards, enclosures, specialty modules, and test/dev products from one source
- AS9100 and ISO9001 certified company

The AMC535 is based on the Altera Arria-10™ SOC SX660 FPGA in F1517 package with integrated dual ARM A9 Core. The AMC535 is compliant to the AMC.1, AMC.2, AMC.3 and/or AMC.4 specification.

The module routes all LA/HA/HB and 10 DP SERDES to the FMC slot.

The on-board, re-configurable FPGA which interfaces directly to the AMC FCLKA and TCLKA–D via a Cross Bar (CBS) MLVDS. The FPGA has interface to dual DDR4, 64-bit wide, with 16 GB total memory. This allows for large buffer sizes to be stored during processing as well as for queuing the data to the host.

The integrated dual ARM A9 Core runs at 1.2 GHz with its own dedicated 2G of DDR4 Memory bank. The module has 4 GB of eMMC Flash.

REFERENCE DESIGN

VadaTech provides a reference design implementation for our FPGAs complete with VHDL source code and configuration binaries. The reference design focuses on the I/O ring of the FPGA to demonstrate low-level operation of the interconnections between the FPGA and other circuits on the board and/or backplane. It is geared to prove out the hardware for engineering/factory diagnostics and customer acceptance of the hardware, but it does not strive to implement a particular end application.

BLOCK DIAGRAM

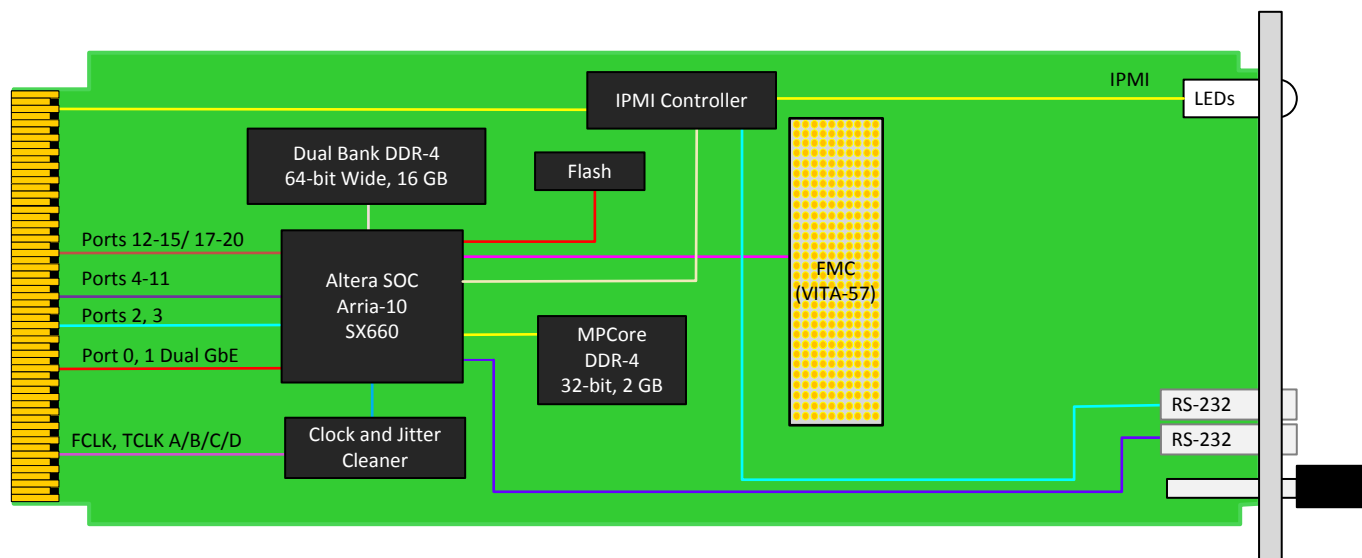


Figure 1: AMC535 Block Diagram

SPECIFICATIONS

Architecture		
Physical	Dimensions	Single module, mid-size (full-size optional)
		Width: 2.89" (73.5 mm)
		Depth 7.11" (180.6 mm)
Type	AMC FPGA	Arria-10™ SOC SX660 FPGA
		Dual bank of DDR4 (64-bit wide)
Standards		
AMC	Type	AMC.1, AMC.2, and AMC.4 (FPGA programmable)
Module Management	IPMI	IPMI version 2.0
PCIe	Lanes	Dual x4 or x8 via FPGA to AMC
SRIO/Aurora	Lanes	Dual x4 via FPGA to AMC
Ethernet	1/10/40GbE	Dual 1/10/40 GbE via FPGA (ports 0-1 and 4-11)
Configuration		
Power	AMC535	~30W (application specific)
Environmental	Temperature	Operating Temperature: -5° to 45°C (55°C for limited time, performance restrictions may apply), industrial and military versions also available. (See environmental spec sheet)
		Storage Temperature: -40° to +85°C
	Vibration	Operating 9.8 m/s² (1.0 G), 5 to 500Hz
	Shock	30Gs on each axis
Front Panel	Relative Humidity	5 to 95 per cent, non-condensing
	Interface Connectors	MGT RS-232 and CPU RS-232
	LEDs	IPMI management control
		4 user defined LEDs
	Mechanical	Hot swap ejector handle
Software Support	Operating System	Linux
Conformal Coating		Humiseal 1A33 Polyurethane (Optional)
		Humiseal 1B31 Acrylic (Optional)
Other		
MTBF	MIL Hand book 217-F @ TBD Hrs	
Certifications	Designed to meet FCC, CE and UL certifications where applicable	
Standards	VadaTech is certified to both the ISO9001:2000 and AS9100B:2004 standards	
Warranty	Two (2) years	

INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of ATCA and µTCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTM), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

ORDERING OPTIONS

AMC535 – A0C – 0EF – G0J

A = Ports 12-15/17-20

0 = Not routed to FPGA
1 = Routed

C = Front Panel Size

1 = Reserved
2 = Mid-size (4HP)
3 = Full-size (6HP)
5 = Mid-size, MTCA.1 (captive screw)
6 = Full-size, MTCA.1 (captive screw)

E = FPGA Speed

1 = Highest
2 = High
3 = Reserved

F = PCIe Option

0 = No PCIe
1 = PCIe on ports 4 – 7
2 = PCIe on ports 8 – 11
3 = PCIe on ports 4 – 11

G = Clock Holdover Stability

0 = Standard XO
1 = Stratum-3 (TCXO)

J = Temperature Range and Coating

0 = Commercial (–5° to +55° C), No coating
1 = Commercial (–5° to +55° C), Humiseal 1A33 Polyurethane
2 = Commercial (–5° to +55° C), Humiseal 1B31 Acrylic
3 = Industrial (–20° to +70° C), No coating
4 = Industrial (–20° to +70° C), Humiseal 1A33 Polyurethane
5 = Industrial (–20° to +70° C), Humiseal 1B31 Acrylic
6 = Military (–40° to +85° C), Humiseal 1A33 Polyurethane*
7 = Military (–40° to +85° C), Humiseal 1B31 Acrylic*

*Edge of module for conduction-cooled boards

RELATED PRODUCTS



VT899 Cube Chassis



FMC223 High Speed
FMC for DAC



UTC020 1000W
Power Module

CONTACT US

VadaTech Corporate Office

198 N. Gibson Rd.
Henderson, NV 89014
Email: info@vadatech.com
Telephone: +1 702 896-3337
Fax: +1 702 896-0332

Asia Pacific Sales Office

7 Floor, No. 2, Wenhui Street, Neihu District,
Taipei 114, Taiwan
Email: info@vadatech.com
Telephone: +886-2-2627-7655
Fax: +886-2-2627-7792

VadaTech European Sales Office

Ocean Village Innovation Centre, Ocean Way,
Ocean Village, Southampton, SO14 3JZ
Email: info@vadatech.com
Telephone: +44 2380 381982
Fax: +44 2380 381983