



KEY FEATURES

- AMC.1 and AMC.3
- Single-width, mid-height (option for full-height)
- 4 Gigabit Ethernet ports via RJ-45
- On board 2.5" disk with direct connect to Ports 2 and 3
- PCIe Gen2 x4 lanes to Ports 4-7
- IPMI 2.0 compliant
- RoHS compliant
- OS support for:
 - Linux
 - Windows
 - Solaris
 - VxWorks

The AMC610 is a 4 port Gigabit Ethernet (GbE) AdvancedMC™ (AMC) module with 2.5" Disk. VadaTech offers this product in a single-width, half-height (option for full-height) form factor based on the AMC.1 specification.

The AMC610 is based on the latest Intel® Gigabit Ethernet controller (82580 chip).

VadaTech can modify this product to meet special customer requirements without NRE (minimum order placement is required).

AdvancedMC™

AMC 4 Port Gigabit Ethernet

SPECIFICATIONS

Architecture		
Physical	Dimensions	Single-Width, Mid-Height (Full-Height option)
		Width: 2.89 in. (73.5 mm)
		Depth: 7.11 in. (180.6 mm)
Type	AMC GbE	4 port Gigabit Ethernet with 2.5" Disk
		10/100/1000 Mbps operation - Copper
		IP, TCP, and UDP checksum off load capabilities, Stateless off loads (Header split, RSS)
		UDP/TCP transmit segmentation Off load (TSO), SCTP receive and transmit checksum off load
Standards		
AMC	Type	AMC.1 and AMC.3
Module Management	IPMI	IPMI Version 2.0
PCIe	Lanes	Gen2 x4
Configuration		
Power	AMC610	9W Max
Environmental	Temperature	Operating Temperature: 0° to 65° C (Air flow requirement is to be greater than 200 LFM)
		Storage Temperature: -40° to +90° C
	Vibration	1G, 5-500Hz each axis
	Shock	30Gs each axis
	Relative Humidity	5 to 95 percent, non-condensing
Front Panel	Interface Connectors	Quad RJ-45 connector
	LEDs	IPMI Management Control
		Activity and Link
	Mechanical	Hot Swap Ejector Handle
Software Support	Operating Systems	Linux, Windows, Solaris and VxWorks
Other		
MTBF	MIL Handbook 217-F >TBD	
Certifications	Designed to meet FCC, CE and UL certifications where applicable	
Standards	VadaTech is certified to both the ISO9001:2000 and AS9100B:2004 standards	
Compliance	RoHS and NEBS	
Warranty	Two (2) years	
Trademarks and Logos	The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedMC™ and the AdvancedTCA™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.	

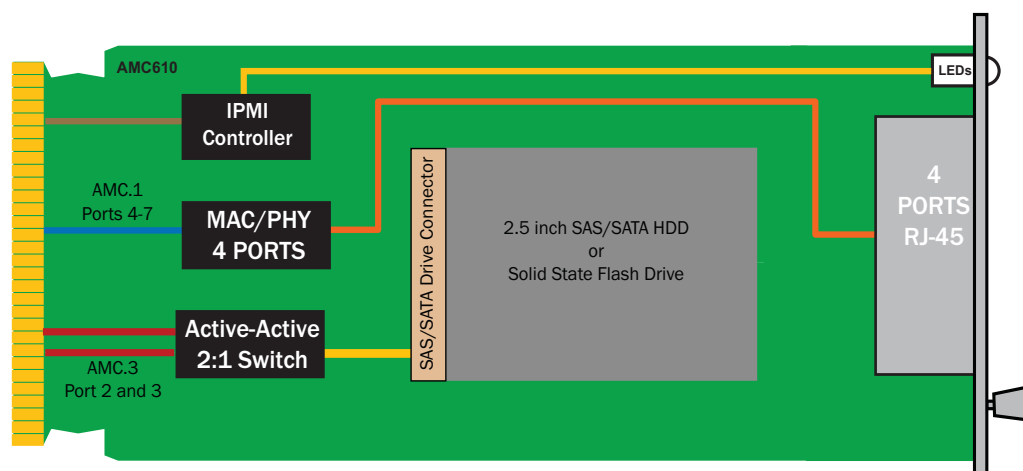


FIGURE 1. AMC610 Functional Block Diagram

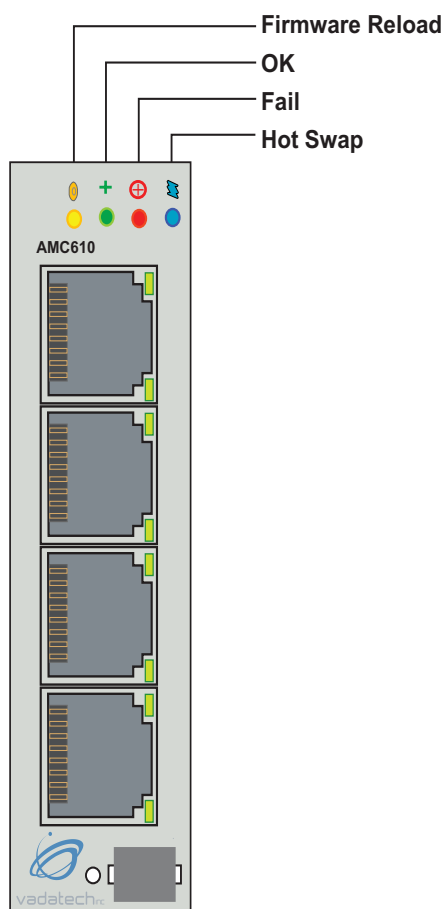


FIGURE 2. AMC610 Front Panel

ORDERING OPTIONS

AMC610 - ABC - DOF- 00J

A = SATA Drive Capacity

- 0 = None
- 1 = 250 GB
- 2 = 500 GB
- 3 = 640 GB
- 4 = Reserved
- 5 = Reserved
- 6 = Reserved

(Contact sales for availability of other size)

B = SATA Disk Option

- 0 = Standard
- 1 = 24x7

C = Front Panel Height

- 1 = Reserved
- 2 = Mid-Height
- 3 = Full-Height

D = SATA Solid State Disk

- 0 = None
- 1 = 40 GB MLC
- 2 = 80 GB MLC
- 3 = 160GB MLC
- 4 = Reserved
- 5 = Reserved
- 6 = 32GB SLC
- 7 = Reserved

(Contact sales for availability of other size)

J = Conformal Coating

- 0 = None
- 1 = Humiseal 1A33 Polyurethane
- 2 = Humiseal 1B31 Acrylic

F = SAS Drive Capacity

- 0 = None
- 1 = Reserved
- 2 = 146 GB
- 3 = 300 GB
- 4 = 600 GB
- 5 = Reserved