

FMC230

MIMO 300 MHz to 6 GHz Versatile Wideband Transceiver FMC

Key Features

- Utilizing Analog Devices AD9371 or AD9375
- Complete transceiver signal chain solution
- Frequency range 300 MHz to 6 GHz
- Tx synthesis bandwidth (BW) up to 250 MHz
- Rx bandwidth: 8 MHz to 100 MHz
- Supports Time Division Duplex (TDD) and Frequency Division Duplex (FDD) operation
- On-board clocking or external clock with multi-transceivers synchronization capability

Benefits

- High density transceiver with intensive data processing capability
- Flexible clocking
- Observation channels for implementation of error correction functions
- Sniffer Receiver channels can monitor different frequency bands



vadatech
THE POWER OF VISION



FMC230

The FMC230 is a FPGA Mezzanine Card (FMC) per VITA 57.1 standard, offering small footprint and low power dual fully featured wideband transceivers.

The FMC230 utilizes single AD9371 or AD9375. The AD9371/AD9375 is a highly integrated, wideband radio frequency transceiver offering dual channel transmitter (TX) and receivers (RX) with integrated synthesizer, and digital signal processing functions. Each complete Rx and Tx subsystem includes dc offset correction, quadrature error correction (QEC), and programmable digital filters.

The AD9375 further provides a DPD (fully integrated Digital Pre-Distortion actuator and adaptation engine).

The FMC230 operates within the 300 MHz to 6.0 GHz frequency range, covering most licensed and unlicensed bands. The clocking is via the front panel or an internal clock. The FMC230 is an ideal choice for the development and/or deployment of advanced RF solutions. This Multiple Input Multiple Output (MIMO) module is the most versatile FMC in the market.

Block Diagram

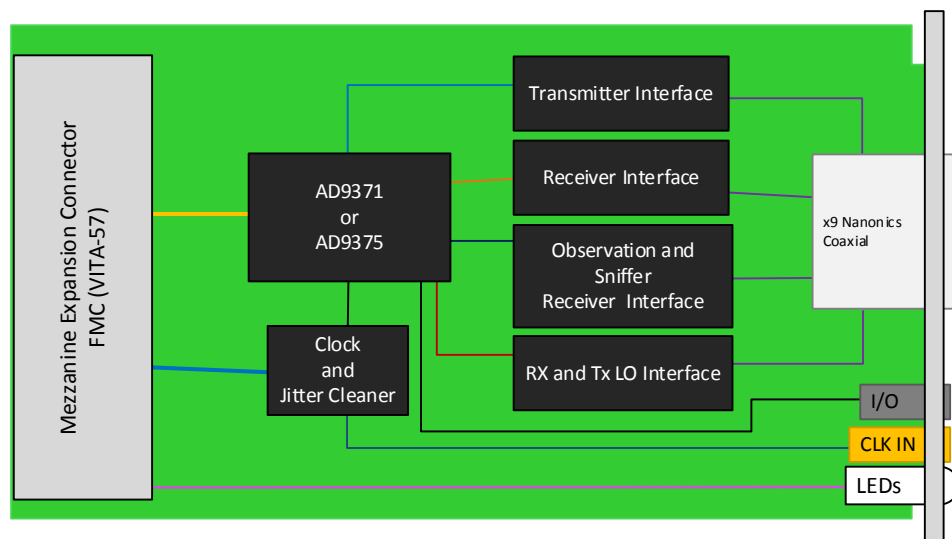


Figure 1: FMC230 Functional Block Diagram


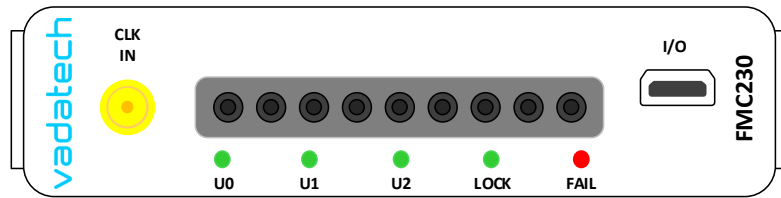


Figure 2: Front Panel

Supported Software

The FMC230 is compatible with Analog Devices design tools for AD9371 or AD9375

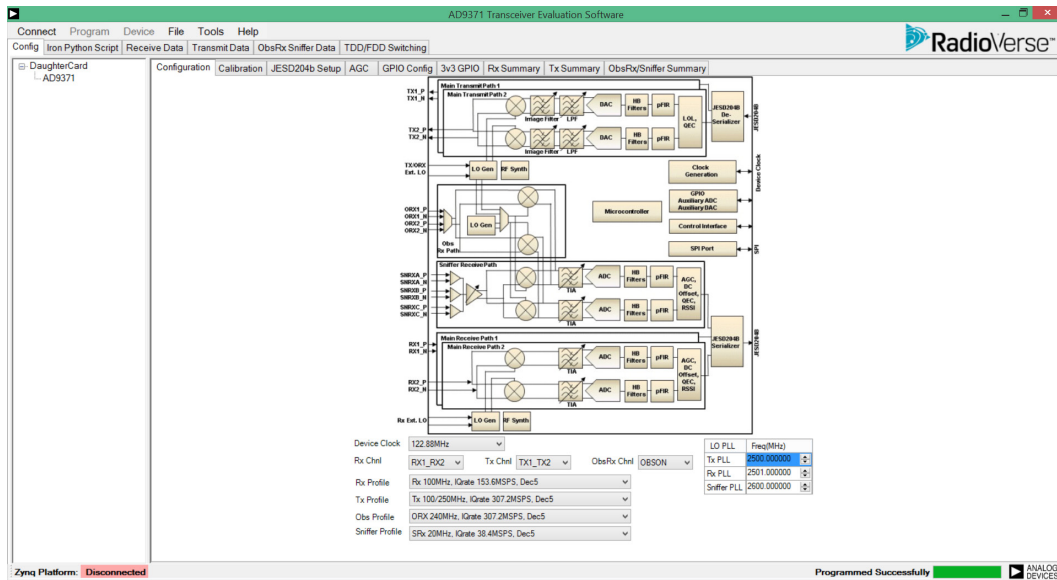

Specifications

Architecture		
Physical	Dimensions	Single module
		Width: 2.71" (69 mm)
		Depth 3.01" (76.5 mm)
Type	FMC	MIMO
Standards		
FMC	Type	ANSI/VITA 57.1-2008
Configuration		
Power	FMC230	6W
Environmental	Temperature	Operating temperature: -5° to 55° C, industrial and extended versions also available (See environmental spec. sheet)
		Storage Temperature: -40° to +85°C
	Vibration	Operating 9.8 m/s ² (1G), 5 to 500Hz on each axis
	Shock	Operating 30G on each axis
	Relative Humidity	5 to 95 per cent, non-condensing
Front Panel	Interface Connectors	9x Nanonics coaxial, single SSMC, 10 singled ended or 5 LVDS I/O via high density connector
	LEDs	Status
Software Support	Operating System	Agnostic
Conformal Coating		Humiseal 1A33 Polyurethane (Optional)
		Humiseal 1B31 Acrylic (Optional)
Other		
MTBF	MIL Hand book 217-F@ TBD hrs	
Certifications	Designed to meet FCC, CE and UL certifications, where applicable	
Standards	VadaTech is certified to both the ISO9001:2000 and AS9100B:2004 standards	
Warranty	Two (2) years	

INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of ATCA, μ TCA and VPX products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTM), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

Ordering Options

FMC230 – 0B0-000-G0J

		G = FMC Board Spacing
		0 = 10 mm (per VITA-57 specification) 1 = 17.5 mm*
B = MIMO Device		
0 = AD9371 1 = AD9375		
		J = Temperature Range and Coating
		0 = Commercial (–5° to +55° C), No coating 1 = Commercial (–5° to +55° C), Humiseal 1A33 Polyurethane 2 = Commercial (–5° to +55° C), Humiseal 1B31 Acrylic 3 = Industrial (–20° to +70° C), No coating 4 = Industrial (–20° to +70° C), Humiseal 1A33 Polyurethane 5 = Industrial (–20° to +70° C), Humiseal 1B31 Acrylic 6 = Extended (–40° to +85° C), Humiseal 1A33 Polyurethane ** 7 = Extended (–40° to +85° C), Humiseal 1B31 Acrylic **

* For use with carriers that require higher mating clearance, such as VadaTech AMC595.

** Conduction cooled, temperature is at edge of module. Consult factory for availability.

Related Products

VT951



- MicroTCA rugged 1U 19" rackmount chassis platform
- Designed to meet MIL-STD-810F, MIL-STD-901D for shock/vibration
- Designed to meet MIL-STD-461E for EMI

FMC214



- Dual complete transceiver signal chain solution using Analog Devices AD9361 transceiver
- Frequency range 70 MHz to 6 GHz with instantaneous bandwidth from 200 kHz to 56 MHz
- MIMO transceiver is Time Domain Duplex (TDD) and Frequency Domain Duplex (FDD) compatible

AMC599



- Xilinx UltraScale™ XCKU115 FPGA
- Dual ADC @ 6.4 GSPS 12-bits or quad ADC at 3.2 GSPS
- Dual DAC (AD9162 or AD9164) @ 12 GSPS, 16-bits

Contact

VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014

Phone: +1 702 896-3337 | Fax: +1 702 896-0332

Asia Pacific Sales Office

7 Floor, No. 2, Wenhui Street, Neihu District, Taipei 114, Taiwan

Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

VadaTech European Sales Office

VadaTech House, Bulls Copse Road, Southampton, SO40 9LR

Phone: +44 2380 016403

info@vadatech.com | www.vadatech.com

Choose VadaTech

We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



vadatech
THE POWER OF VISION

Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

© 2017 VadaTech Incorporated, All rights reserved.
DOC NO. 4FM737-12 REV 01 | VERSION 1.1- AUG/17