

FMC Dual 10/100/1000 GbE Module - FMC102



KEY FEATURES

- FPGA Mezzanine Card (FMC) per VITA-57
- Single module
- Dual 10/100/1000 Mbps GbE ports
- Connection via two RJ-45 ports
- LED for Power Fail status
- RoHS compliant

Benefits of Choosing VadaTech

- Array of FMC's and FMC carriers available from VadaTech
- Design utilizes proven VadaTech subcomponents and engineering techniques
- Electrical, mechanical, software, and system-level expertise in house
- Full ecosystem of front and rear boards, enclosures, specialty modules, and test/dev products from one source
- AS9100 and ISO9001 certified company

The FMC102 is an FPGA Mezzanine Module per VITA 57 specification. The FMC102 has two GbE PHY which allows 10/100/1000 Mbit to be routed via SERDES to the appropriate FMC pins.

VadaTech can modify this product to meet special customer requirements. Contact us to discuss your application.

INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of ATCA and µTCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTM), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

BLOCK DIAGRAM

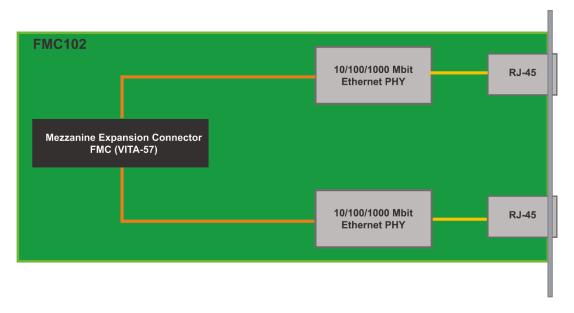


Figure 1: Block Diagram



Figure 2: Front Panel



SPECIFICATIONS

Architecture		
Physical	Dimensions	Single module
		Width 2.71" (69 mm)
		Depth 3.01" (76.5 mm)
Туре	FMC	10/100/1000 GbE, Single FMC slot
Standards		
FMC	VITA-57	ANSI/VITA 57.1-2008
Configuration		
Power	FMC102	1 W
Environmental	Temperature	Operating Temperature: 0° to 65° C with air flow requirements >400 LFM
		Storage Temperature: –40° to +90° C
	Vibration	1G, 5 to 500 Hz each axis
	Shock	30Gs each axis
	Relative Humidity	5 to 95 percent, non-condensing
Front Panel	External Interface	RJ-45 (2x)
	LEDs	Link/Activity, Power Fail
Conformal Coating		Humiseal 1A33 Polyurethane (Optional)
		Humiseal 1B31 Acrylic (Optional)
Other		
MTFB	MIL Hand book 217-F @ TBD Hrs.	
Certifications	Designed to meet FCC, CE and UL certifications where applicable	
Standards	VadaTech is certified to both the ISO9001:2000 and AS9100B:2004 standards	
Warranty	Two (2) years	
Trademarks and Disclaimer	The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice	

ORDERING OPTIONS

FMC102 - 000 - 000 - 0HJ

H = Temperature Range

0 = Commercial

1 = Industrial

J = Conformal Coating

0 = None

1 = Humiseal 1A33 Polyurethane

2 = Humiseal 1B31 Acrylic

RELATED PRODUCTS







AMC515 Virtex-7 FPGA Carrier

FMC108 Two QSFP+ FMC FMC150 IRIG-B FMC

CONTACT US

VadaTech Corporate Office

198 N. Gibson Rd. Henderson, NV 89014 Email: info@vadatech.com

Telephone: +1 702 896-3337 Fax: +1 702 896-0332

Asia Pacific Sales Office

7 Floor, No. 2, Wenhu Street, Neihu District, Taipei 114, Taiwan Email: info@vadatech.com

Telephone: +886-2-2627-7655 Fax: +886-2-2627-7792

VadaTech European Sales Office

Ocean Village Innovation Centre, Ocean Way, Ocean Village, Southampton, SO14 3JZ Email: info@vadatech.com

Telephone: +44 2380 381982 Fax: +44 2380 381983

