

6U μ TCA Desktop Chassis, 6 AMC Full Size, 40GbE – VT898

6U μ TCA Chassis, 6 AMCs



40G

KEY FEATURES

- μ TCA Desktop (rackmount optional) System Platform 10" x 6U x 10.5" deep
- Redundant cooling in push/pull front-to-rear airflow configuration
- Spring-loaded carry handle is flush to top of chassis when not in use
- Up to 6 AMCs in single module/full-size
- 40GbE capable
- Single 1000W AC Power supply
- Telco Alarm
- Routes FCLKA, TCLKA, TCLKB, TCLKC, and TCLKD
- JTAG Switch Module (JSM) option
- No active components on the backplane
- ESD-Jack at the top front
- RoHS compliant

Benefits of Choosing VadaTech

- 40GbE MicroTCA Chassis
- Convenient spring-loaded carry handle, weight balanced positioning
- Electrical, mechanical, software, and system-level expertise in house
- Full ecosystem of front and rear boards, enclosures, specialty modules, and test/dev products from one source
- AS9100 and ISO9001 certified company

The VT898 is a 6U μ TCA chassis that provides 6 full-size AMC slots that can accept any AMC.1, AMC.2, AMC.3 and/or AMC.4 modules. The chassis is ideal for desktop/lab use. Only 10" wide, the enclosure has a spring loaded carry handle which remains flush with the chassis when not in use. The 40GbE backplane has routing for FCLK, TCLKA, TCLKB, TCLKC, and TCLKD.

The CLK3 option on the VT898 can be configured for the Fabric clock, Telecom clock, or Fabric B. There is an option for Port 2 and 3 to be directly connected among the adjacent AMCs or to the fabric B (AMC.3 SATA/SAS switch option on the MCH). The chassis also routes ports 12-15 to 17-20 of the adjacent slot. The VT898 has a Telco Alarm as well as redundant FRU information devices and carrier locators.

VadaTech can modify this product to meet special customer requirements. Contact us to discuss your application.

6U μ TCA Desktop Chassis, 6 AMC Full Size, 40GbE – VT898

POWER SUPPLIES

The VT898 has a single 1000W AC. The AC input voltage is from 110 to 240V AC (frequency from 47 Hz to 63 Hz) from the back of the chassis. Unique easy-glide strips provide smooth PSU insertion/extraction.

COOLING AND TEMPERATURE SENSORS

The VT898 has dual intelligent fan trays that are designed to minimize acoustic noise. The redundancy allows fail-safe operation in case one of the Cooling Units becomes non-operational. The cooling airflow is from front to back. The removable air filter has a switch to detect its presence and can be monitored for when it needs to be replaced.

There are a total of 12 temperature sensors in the chassis that monitor the intake and the outtake air temperature throughout the chassis.

TELCO ALARM

The VT898 provides Telco alarm functionality to alert about any anomaly within the chassis. The Telco Alarm is provide via a Micro DB-9 as well as LEDs in the front to show any anomaly. The Telco alarm module is built into the chassis, located above the fan tray.

FRU INFORMATION AND CARRIER LOCATOR

The VT898 has dual redundant FRU information and Carrier Locators. The Carrier Locator is assigned by mechanical dip switches which are easily accessible. The MCH reads the Locator via its private I2C bus.

40G BACKPLANE

The 40GbE backplane does not have any active components, making serviceability easy. The backplane utilizes Megtron 6 PCB material and via back-drilling for superior signal integrity.


SCORPIONWARE™ SOFTWARE

VadaTech's Scorpionware software can be used to access information about the current state of the Shelf or the Carrier, obtain information such as the FRU population, or monitor alarms, power management, current sensor values, and the overall health of the Shelf. The software GUI is very powerful, providing a Virtual Carrier and FRU construct for a simple, effective interface.


INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of ATCA and μ TCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTM), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

CHASSIS CONFIGURATION

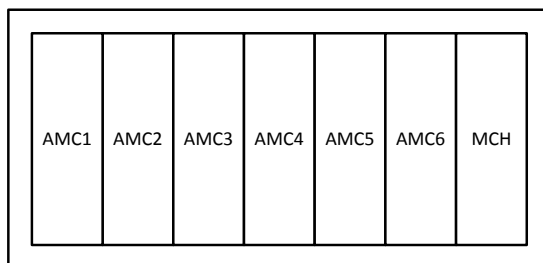

BACKPLANE CONNECTIONS

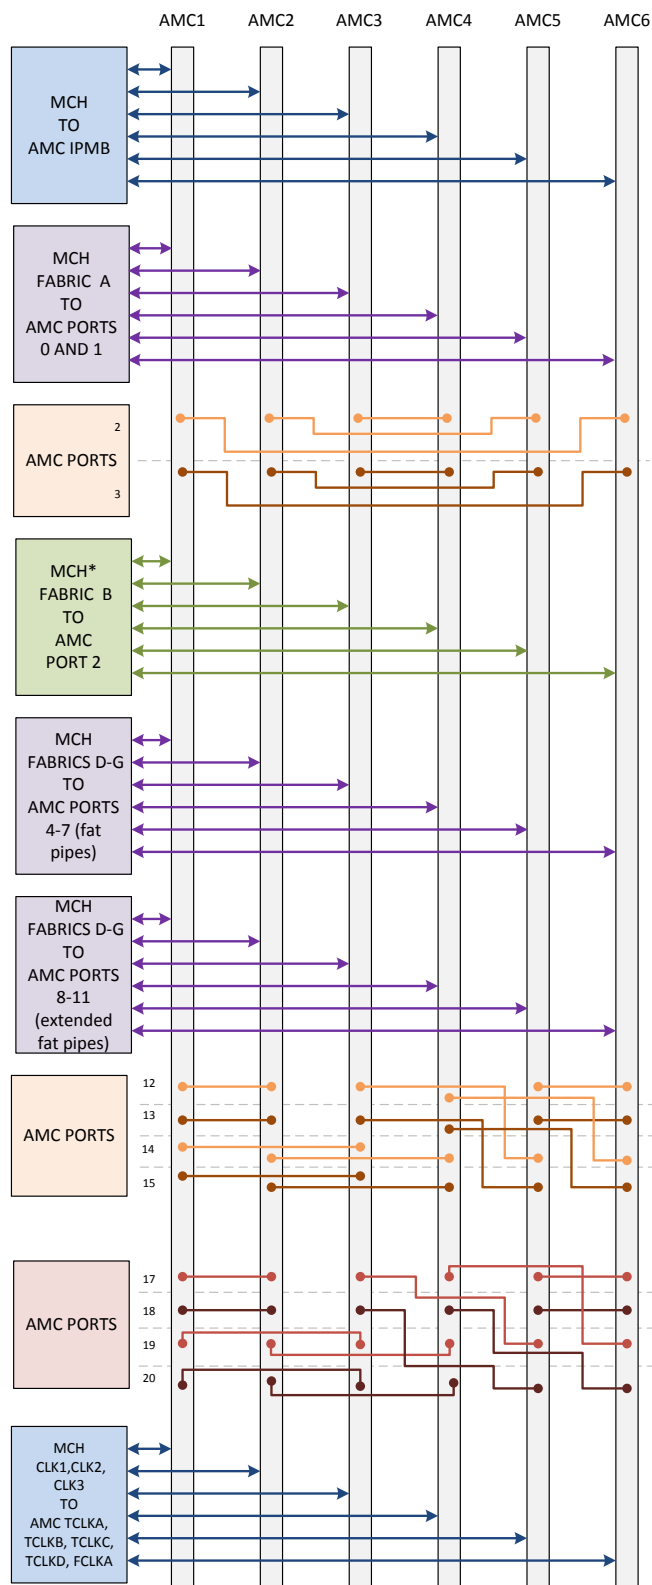

SPECIFICATIONS

Architecture		
Physical	Dimensions	Height 6U
		Width 10"
		Depth 10.25"
		Weight ~25 lbs. (no AMCs inserted)
Type	μTCA Chassis	6 AMC.0 full-size slots
Standards		
AMC	Type	AMC.0, AMC.1, AMC.2, AMC.3 and AMC.4
μTCA	Type	MicroTCA.0
Configuration		
Power	VT866	1000 W, 110V to 240V AC with frequency from 47 to 63 Hz
Environmental	Temperature	Operating Temperature: 0° to 55° C
		Storage Temperature: -40° to +70° C
	Altitude	10,000 ft operating
		40,000 ft non-operating
	Relative Humidity	5 to 95 percent, non-condensing
Conformal Coating	Humiseal 1A33 Polyurethane (Optional)	
	Humiseal 1B31 Acrylic (Optional)	
Other		
MTBF	MIL Hand book 217-F @ TBD Hrs	
Certifications	Designed to meet FCC, CE and UL certifications where applicable	
Standards	VadaTech is certified to both the ISO9001:2000 and AS9100B:2004 standards	
Compliance	RoHS and NEBS	
Warranty	Two (2) years	
Trademarks and Disclaimer	The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice	



ORDERING OPTIONS

VT898 – 0BC – D00 – 0HJ

B = Ports 2 and 3

- 1 = Direct connections
- 2 = To MCH

C = MCH CLK3 Channels

- 1 = Telco
- 2 = FCLKA
- 3 = Fabric B

D = JSM

- 0 = JSM not included
- 1 = JSM included

H = Operating Temperature

- 1 = Commercial
- 2 = Industrial

J = Conformal Coating

- 0 = None
- 1 = Humiseal 1A33 Polyurethane
- 2 = Humiseal 1B31 Acrylic

RELATED PRODUCTS



UTC004 40G MCH



AMC534
100G FPGA



AMC626
Storage Module

CONTACT US

VadaTech Corporate Office

198 N. Gibson Road,
Henderson, NV 89014
Email: info@vadatech.com
Telephone: +1 702 896-3337
Fax: +1 702 896-0332

Asia Pacific Sales Office

7 Floor, No. 2, Wenhui Street, Neihu District,
Taipei 114, Taiwan
Email: info@vadatech.com
Telephone: +886-2-2627-7655
Fax: +886-2-2627-7792

VadaTech European Sales Office

Ocean Village Innovation Centre, Ocean Way,
Ocean Village, Southampton, SO14 3JZ
Email: info@vadatech.com
Telephone: +44 2380 381982
Fax: +44 2380 381983