

VPX598

Quad DAC @ 12 GSPS with
Quad ADC @ 3 GSPS, Kintex
UltraScale™, 3U VPX



VPX598

Key Features

- 3U FPGA Quad DAC and Quad ADC per VITA 46
- Xilinx Kintex UltraScale™ XCKU115 FPGA
- Quad ADC channels (AD9208) 14-bits @ 3 GSPS
- Quad DAC channels (AD9162 or AD9164) 16-bits @ 12 GSPS
- Two banks of 64-bit wide and a single bank of 32-bit wide DDR-4 for a total of 20 GB
- Health Management through dedicated Processor

Benefits

- Closely coupled ADC and DAC for low-latency response, dual channel for I/Q
- Xilinx UltraScale™ XCKU115 FPGA provides powerful compute resource
- Electrical, mechanical, software, and system-level expertise in house
- Full system supply from industry leader
- AS9100 and ISO9001 certified company

OpenVPX™



vadatech
THE POWER OF VISION



VPX598

The VPX598 provides quad ADC with sample rates of up to 3 GSPS (AD9208) at 14-bits and a quad DAC (Analog Devices AD9162 or AD9164) with update rates of up to 12 GSPS and direct RF synthesis at 6 GSPS, 16-bits making it suitable for signal capture/analysis applications such as COMINT/SIGINT, radar, research and instrumentation.

The unit has an on-board, re-configurable UltraScale™ XCKU115 FPGA which interfaces directly to ADC/DAC. The FPGA has interface to three banks of DDR4 memory channels (dual 64-bit wide and a single bank of 32-bit for a total of 20 GB). This allows for large buffer sizes to be stored during processing as well as for queuing the data to the host.

The module routes x8 high speed SERDES to the P1 that could be configured as PCIe/SRIO/10GbE/Aurora etc. and x8 high speed SERDES to P2 that could be configured for SRIO/10GbE/Aurora. The module has an on board dedicated health management CPU which complies with the OpenVPX standard.

The unit is available in a range of temperature and shock/vib specifications per ANSI/VITA 47, up to v3 and OS2.

Please contact VadaTech for details of Conduction Cooled versions.



Figure 1: VPX598

Block Diagram

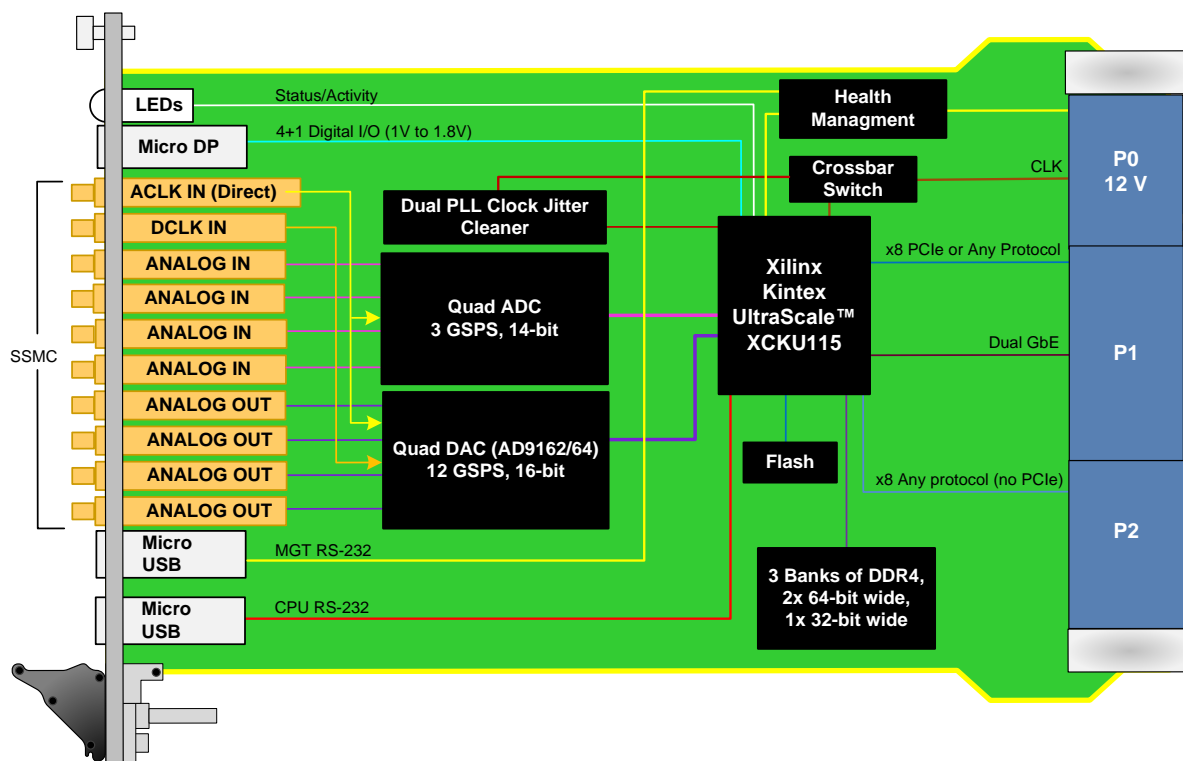


Figure 2: VPX598 Functional Block Diagram for Option A=0,1

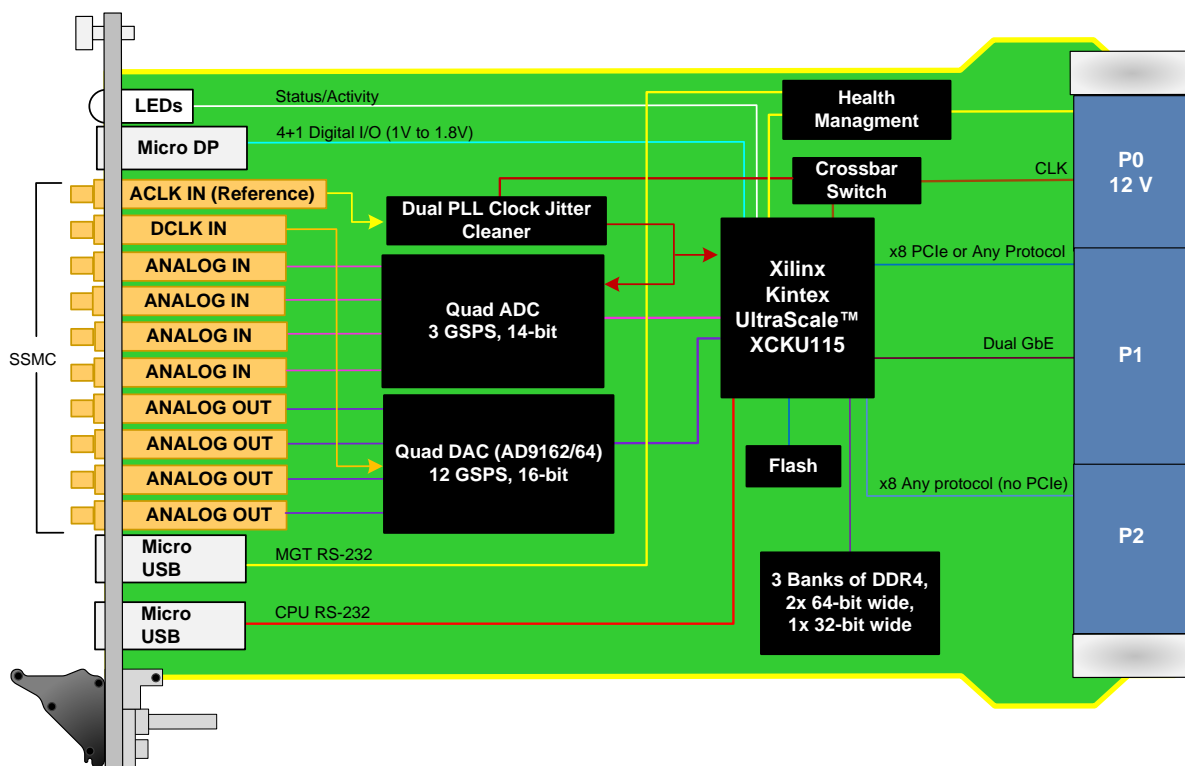


Figure 3: Functional Block Diagram for Option A=2,3

Reference Design

VadaTech provides an extensive range of Xilinx based FPGA products. The FPGA products are in two categories; FPGA boards with FMC carriers and FPGA products with high speed ADC and DACs. The FPGA products are designed in various architectures such as AMC modules, PCIe cards and Open VPX.

VadaTech provides a reference design implementation for our FPGAs complete with VHDL source code, documentation and configuration binaries. The reference design focuses on the I/O ring of the FPGA to demonstrate low-level operation of the interconnections between the FPGA and other circuits on the board and/or backplane. It is designed to prove out the hardware for early prototyping, engineering/factory diagnostics and customer acceptance of the hardware, but it does not strive to implement a particular end application. The reference VHDL reduces customer time to develop custom applications, as the code can be easily adapted to meet customer's application requirements.

The reference design allows you to test and validate the following functionality (where supported by the hardware):

- Base and Fabric channels
- Clocks
- Data transfers
- Memory
- User defined LEDs

Xilinx provides Vivado Design Suite for developing applications on Xilinx based FPGAs. VadaTech provides reference VHDL developed using the Vivado Design Suite for testing basic hardware functionality. The reference VHDL is provided royalty free to use and modify on VadaTech products, so can be used within applications at no additional cost. However, customers are restricted from redistributing the reference code and from use of this code for any other purpose (e.g. it should not be used on non-VadaTech hardware).

The reference VHDL is shipped in one or more files based on a number of ordering options. Not all ordering options have an impact on the FPGA and a new FPGA image is created for those options that have direct impact on the FPGA. Use the correct reference image to test your hardware. For more information, refer to the FPGA reference design manual for your device which can be accessed from customer support site along with the reference images.

Supported Software

- Default FPGA image stored in flash memory
- Linux BSP
- Build Scripts
- Device Driver
- Reference application projects for other ordering options

The user may need to develop their own FPGA code or adapt VadaTech reference code to meet their application requirements. The supplied pre-compiled images may make use of hardware evaluation licenses, where necessary, instead of full licenses. This is because VadaTech does not provide licenses for the Vivado tool or Xilinx IP cores, so please contact Xilinx where these are required.

Xilinx also provides System Generator tools for developing Digital Signal Processing (DSP) applications.

See the following links:

[Xilinx Vivado Design Suite](#), [Xilinx System Generator for DSP](#).

Specifications

Architecture		
Physical	Dimensions	3U, 2" pitch
FPGA		Xilinx Kintex UltraScale™ XCKU115
Configuration		
Power	VPX598	~70 W (dependent on FPGA load), could be as high as 85 W
Memory		Two banks of DDR4, 64-bit wide, 1 bank of DDR4 32-bit wide (20 GB total)
Front Panel	SSMC	10x for Analog In (4), Analog Out (4), Analog Clock and Digital Clock
	Micro USB	RS-232 from Health Management and RS-232 from FPGA
	LEDs	User defined by the FPGA and Health Management
On-board Interfaces		None
VPX Interfaces	Slot Profiles	See ordering options
	Rear IO	P1: x8 high speed serial links (PCIe/10GbE/SRIO/Aurora per FPGA load) P2: x8 high speed serial links (10GbE/SRIO/Aurora per FPGA load)
	Power Supplies	P0: VS1 = 12 V
Other		
MTBF		MIL Hand book 217-F@ TBD hrs
Certifications		Designed to meet FCC, CE and UL certifications, where applicable
Standards		VadaTech is certified to both the ISO9001:2000 and AS9100B:2004 standards
Warranty		Two (2) years

INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of OpenVPX, ATCA and MTCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTMs), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

Ordering Options

VPX598 – ABC-DEF-GHJ

A = Clock Options	D = FPGA Speed	G = Applicable Slot Profiles
0 = Front panel clock, Standard (XO) 1 = Front panel clock, Stratum-3 (TCXO) 2 = On-board wideband PLL, Standard (XO) 3 = On-board wideband PLL, Stratum-3 (TCXO)	1 = Reserved 2 = High 3 = Highest*	0 = 10 HP
B = DAC	E = ADC	H = Environmental
0 = Quad DAC Channels (AD9162) 1 = Quad DAC Channels (AD9164) 2 = No DAC 3 = Octal DAC Channels (AD9162)+ 4 = Octal DAC Channels (AD9164)+	0 = Quad ADC Channels (AD9208) 1 = Dual ADC Channels (AD9208) 2 = No ADC 3 = Octal ADC Channels (AD9208)++	See Environmental Specification Table below
C = Utilizing the ADC/DAC Nyquist Zones	F = PCIe Option (P1)**	J = Conformal Coating
0 = 1 st /2 nd 1 = 2 nd /3 rd	0 = No PCIe 1 = PCIe x4 2 = PCIe x8	0 = No coating 1 = Humiseal 1A33 Polyurethane 2 = Humiseal 1B31 Acrylic

Notes: *Minimum Order Quantity applies for these FPGA SKU's.

**When the ports are not PCIe the lanes are electrically compatible with SRIQ, XAUI, and other SerDes protocols.

+Option E must be 2 (E = 2) to select this option, Minimum Order Quantity applies.

++Option B must be 2 (B = 2) to select this option, Minimum Order Quantity applies.

Environmental Specification

Air Cooled			Conduction Cooled		
Option H	H = 0	H = 1	H = 2	H = 3	H = 4
Operating Temperature	AC1* (0°C to +55°C)	AC3* (-40°C to +70°C)	CC1* (0°C to +55°C)	CC3* (-40°C to +70°C)	CC4* (-40°C to +85°C)
Storage Temperature	C1* (-40°C to +85°C)	C3* (-50°C to +100°C)	C1* (-40°C to +85°C)	C3* (-50°C to +100°C)	C3* (-50°C to +100°C)
Operating Vibration	V2* (0.04 g2/Hz max)	V2* (0.04 g2/Hz max)	V3* (0.1 g2/Hz max)	V3* (0.1 g2/Hz max)	V3 (0.1 g2/Hz max)
Storage Vibration	OS1* (20g)	OS1* (20g)	OS2* (40g)	OS2* (40g)	OS2* (40g)
Humidity	95% non-condensing	95% non-condensing	95% non-condensing	95% non-condensing	95% non-condensing

Notes: *Nomenclature per ANSI/VITA 47. Contact local sales office for conduction cooled (H = 2, 3, 4).

Available Signal Bandwidth

Ordering Option (Number of Channels)	Interpolation (Minimum)	Maximum Fdata (MHz)	Available Signal Bandwidth (MHz)
Dual/Octal/Quad ADC (E = 0/1/3)	Bypass x1	3000	1500
Quad DAC (B = 0/1)	Bypass x1	Fdac = 5000	Fdac/2 = 2500
Octal DAC (B = 3/4)	Decimation x4	Fdac/4 = 1250	80% to 90% of 1250 (total I/Q)

Related Products

VPX516



- 3U FPGA carrier for FPGA Mezzanine Card (FMC) per VITA 46 and VITA 57
- Xilinx Virtex-7 690T FPGA in FFG-1761 package
- High-performance clock jitter cleaner

VPX592



- 3U FPGA carrier for FPGA Mezzanine Card (FMC) per VITA 46 and VITA 57
- Xilinx Kintex UltraScale™ XCKU115 FPGA
- High-performance clock jitter cleaner

VPX599



- Xilinx Kintex UltraScale™ XCKU115 FPGA
- Dual ADC @ 6.4 GSPS 12-bits
- Dual DAC @ 12 GSPS 16-bits (AD9162 or AD9164)

Contact

VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014

Phone: +1 702 896-3337 | Fax: +1 702 896-0332

Asia Pacific Sales Office

7 Floor, No. 2, Wenhui Street, Neihu District, Taipei 114, Taiwan

Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

VadaTech European Sales Office

VadaTech House, Bulls Copse Road, Southampton, SO40 9LR

Phone: +44 2380 016403

info@vadatech.com | www.vadatech.com

Choose VadaTech

We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

© 2018 VadaTech Incorporated. All rights reserved.

DOC NO. 4FM737-12 REV 01 | VERSION 1.2 – SEP/18



vadatech
THE POWER OF VISION