

# VPX752

Intel® Xeon™ SoC, 6U VPX,  
PCIe Gen3 and 10GbE (XAUI)

## Key Features

- 6U VPX module Intel 5<sup>th</sup> Generation Xeon-D SoC
- PCIe Gen3 x16 (dual x8 or quad x4)
- Quad 10GbE XAUI
- Front-panel video out via DP with dual USB 3.0
- Dual front panel 100/1000/10G ports
- Single XMC site with I/O expansion going to P5/P6
- Dual isolated RS-422/485 and a single RS-232 port
- Health Management through dedicated Processor

## Benefits

- High-density low-power System-on-Chip (SoC)
- Integrated Platform Controller Hub (PCH)
- 32 GB DDR4 with Error Correction Code (ECC) for enhanced reliability, availability and serviceability
- Full system supply from industry leader
- AS9100 and ISO9001 certified company



**vadatech**  
THE POWER OF VISION



# VPX752

The VPX752 is a processor module (VITA 46) for general purpose processing in demanding applications. Based on the Intel 5<sup>th</sup> generation Xeon-D processor, the efficient SoC design has low power consumption and integrated PCH technology.

The module provides quad 10GbE XAUI on P1 and PCIe Gen3 x16 (dual x8 or quad x4) on P2, together with quad GbE to P4. The GbE is software programmable on each port to run as 1000Base-Tx or 1000Base-BX. It also provides Dual 100/1000/10G to the front panel, together with video out and dual USB 3.0 which can be used to implement a user interface for ease of maintenance.

The VPX752 provides 32 GB of DDR4 memory with ECC and Flash for the OS. The BIOS allows booting from on board Flash, off-board SATA, PXE boot and USB. The module has a single XMC slot for additional I/O. The XMC I/O is routed to P5/P6.

The VPX752 has dual isolated RS-422/485 in addition to the single RS-232.

Linux OS is standard on the VPX752, consult VadaTech for other options.

The unit is available in a range of temperature and shock/vib specifications per ANSI/VITA 47, up to V3 and OS2.

# Block Diagram

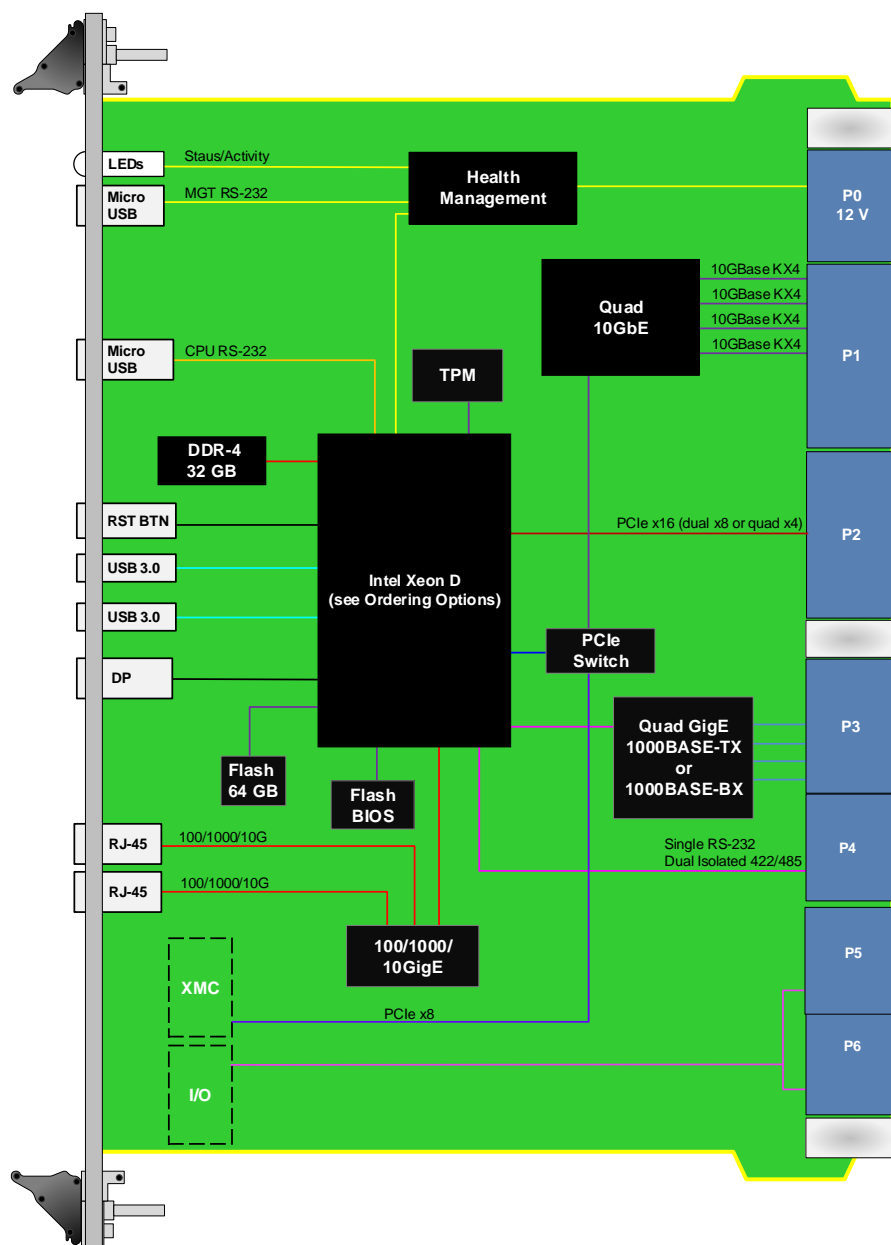


Figure 1: VPX752 Functional Block Diagram

## Front Panel

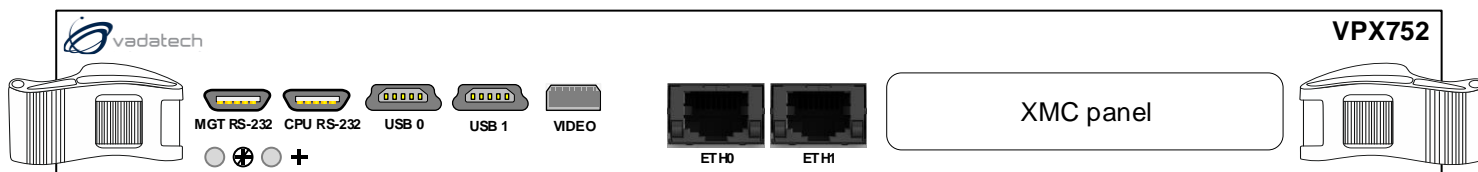


Figure 2: VPX752 Front Panel

# Specifications

<b>Architecture</b>		
<b>Physical</b>	<b>Dimensions</b>	6U, 1" pitch
<b>Configuration</b>		
<b>Power</b>		85 W (fastest CPU)
<b>Processor</b>	<b>CPU</b>	Intel 5th Generation Xeon D-1513N
	<b>Memory</b>	DDR4 32 GB with ECC, Flash
<b>PCIe</b>	<b>Lanes</b>	Gen3 x16 (dual x8 or quad x4)
<b>PCH</b>		Integrated
	<b>Memory</b>	BIOS flash
<b>Front Panel</b>	<b>10 GbE</b>	Dual 100/1000/10GbE via x 2 RJ-45
	<b>Video</b>	1x DP (Display Port)
	<b>Serial</b>	CPU RS-232 via micro USB
	<b>USB</b>	2x USB 3.0
	<b>Micro USB</b>	RS-232 from FPGA and RS-232 from Health Management
	<b>LEDs</b>	User defined by Health Management
<b>On-board Interfaces</b>		XMC site
<b>VPX Interfaces</b>	<b>Slot Profiles</b>	See ordering options
	<b>Rear IO</b>	4x 10GbE KX4 on P1
		16x PCIe Gen3 (dual x8 or quad x4) on P2
		4x GbE on P3
		RS232/422/485 on P4
	<b>Power Supplies</b>	On P0: VS1 = 12 V
<b>Software</b>	<b>OS Support</b>	Linux default, contact Sales for VxWorks and Windows support requirements
<b>Other</b>		
<b>MTBF</b>		MIL Hand book 217-F@ TBD hrs
<b>Certifications</b>		Designed to meet FCC, CE and UL certifications, where applicable
<b>Standards</b>		VadaTech is certified to both the ISO9001:2000 and AS9100B:2004 standards
<b>Warranty</b>		Two (2) years

## INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of OpenVPX, ATCA and MTCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTMs), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

# Ordering Options

## VPX752 – ABC-000-GHJ

A = Processor	G = Applicable Slot Profiles
0 = 4C, 1.6 GHz, 6 MB LLC, Xeon D-1513N 1 = 4C, 2.2 GHz, 6 MB LLC, Xeon D-1520 2 = 8C, 2 GHz, 12 MB LLC, Xeon D-1548 3 = 16C, 1,3 GHz, 24 MB LLC, Xeon D-1577 4 = 8C, 1,6 GHz, 12 MB LLC, Xeon D-1539	0 = 5 HP
B = Trusted Platform Manager (TPM)	H = Environmental
0 = Not installed 1 = Installed	See Environmental Specification Table below
C = XMC Connectors	J = Conformal Coating
0 = VITA 42 1 = VITA 61	0 = None 1 = Humiseal 1A33 Polyurethane 2 = Humiseal 1B31 Acrylic

## Environmental Specification

Option H	Air Cooled		Conduction Cooled		
	H = 0	H = 1	H = 2	H = 3	H = 4
Operating Temperature	AC1* (0°C to +55°C)	AC3* (-40°C to +70°C)	CC1* (0°C to +55°C)	CC3* (-40°C to +70°C)	CC4* (-40°C to +85°C)
Storage Temperature	C1* (-40°C to +85°C)	C3* (-50°C to +100°C)	C1* (-40°C to +85°C)	C3* (-50°C to +100°C)	C3* (-50°C to +100°C)
Operating Vibration	V2* (0.04 g2/Hz max)	V2* (0.04 g2/Hz max)	V3* (0.1 g2/Hz max)	V3* (0.1 g2/Hz max)	V3 (0.1 g2/Hz max)
Storage Vibration	OS1* (20g)	OS1* (20g)	OS2* (40g)	OS2* (40g)	OS2* (40g)
Humidity	95% non-condensing	95% non-condensing	95% non-condensing	95% non-condensing	95% non-condensing

Notes: \*Nomenclature per ANSI/VITA 47. Contact local sales office for conduction cooled (H = 2, 3, 4).

## Related Products

### VPX516



- 3U FPGA carrier for FPGA Mezzanine Card (FMC) per VITA 46 and VITA 57
- Xilinx Virtex-7 690T FPGA in FFG-1761 package
- High-performance clock jitter cleaner

### VPX592



- 3U FPGA carrier for FMC per VITA 46 and VITA 57
- Xilinx Kintex UltraScale™ XCKU115 FPGA
- High-performance clock jitter cleaner

### VPX599



- Xilinx Kintex UltraScale™ XCKU115 FPGA
- Dual ADC @ 6.4 GSPS 12-bits
- Dual DAC @ 12 GSPS 16-bits (AD9162 or AD9164)

# Contact

## VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014

Phone: +1 702 896-3337 | Fax: +1 702 896-0332

## Asia Pacific Sales Office

7 Floor, No. 2, Wenhui Street, Neihu District, Taipei 114, Taiwan

Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

## VadaTech European Sales Office

VadaTech House, Bulls Copse Road, Southampton, SO40 9LR

Phone: +44 2380 016403

[info@vadatech.com](mailto:info@vadatech.com) | [www.vadatech.com](http://www.vadatech.com)

# Choose VadaTech

## We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

## We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

## We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

## We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



**vadatech**  
THE POWER OF VISION

## Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

© 2018 VadaTech Incorporated. All rights reserved.  
DOC NO. 4FM737-12 REV 01 | VERSION 2.0 – MAY/18